

Precise measurement of HFS of positronium

¹mailto : ishida@icepp.s.u-tokyo.ac.jp

A. Ishida^{*,1}

, G. Akimoto*, K. Kato*, T. Suehara*, T. Namba*, S. Asai*, T. Kobayashi*,

H. Saito[†], M. Yoshida**, K. Tanaka**, A. Yamamoto**, I. Ogawa[‡], S. Kobayashi[‡] and T. Idehara[‡]

*Department of Physics and ICEPP, University of Tokyo, 7-3-1 Hongo, Bunkyo-ku, Tokyo, 113-0033, Japan

[†]Institute of Physics, University of Tokyo, 3-8-1 Komaba, Meguro-ku, Tokyo, 153-8902, Japan

**High Energy Accelerator Research Organization (KEK), 1-1 Oho, Tsukuba, Ibaraki, 305-0801, Japan


[‡]FIR Center, University of Fukui, 3-9-1 Bunkyo, Fukui, 910-8507, Japan

Positronium and its hyperfine structure (HFS)

Positronium (Ps)

The bound state of an electron (e^-) and a positron (e^+)

{ orthopositronium (o-Ps) ... 1^3S_1 mostly 3 γ decay
parapositronium (p-Ps) ... 1^1S_0 mostly 2 γ decay

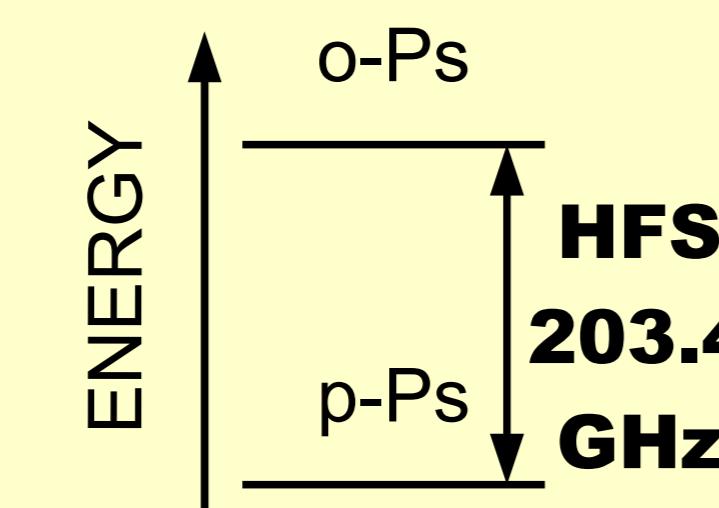

Hyperfine structure (HFS)

- The energy splitting between o-Ps and p-Ps

- The value of HFS

Experimental average

203.388 65(67) GHz (3.3 ppm)


PRA 27, 262 (1983)
PRA 30, 1331 (1984)

Theory

203.391 69(41) GHz (2.0 ppm)

PRL 85, 5094 (2000)

- The measured values are consistent with each other and lower than the theoretical calculation.

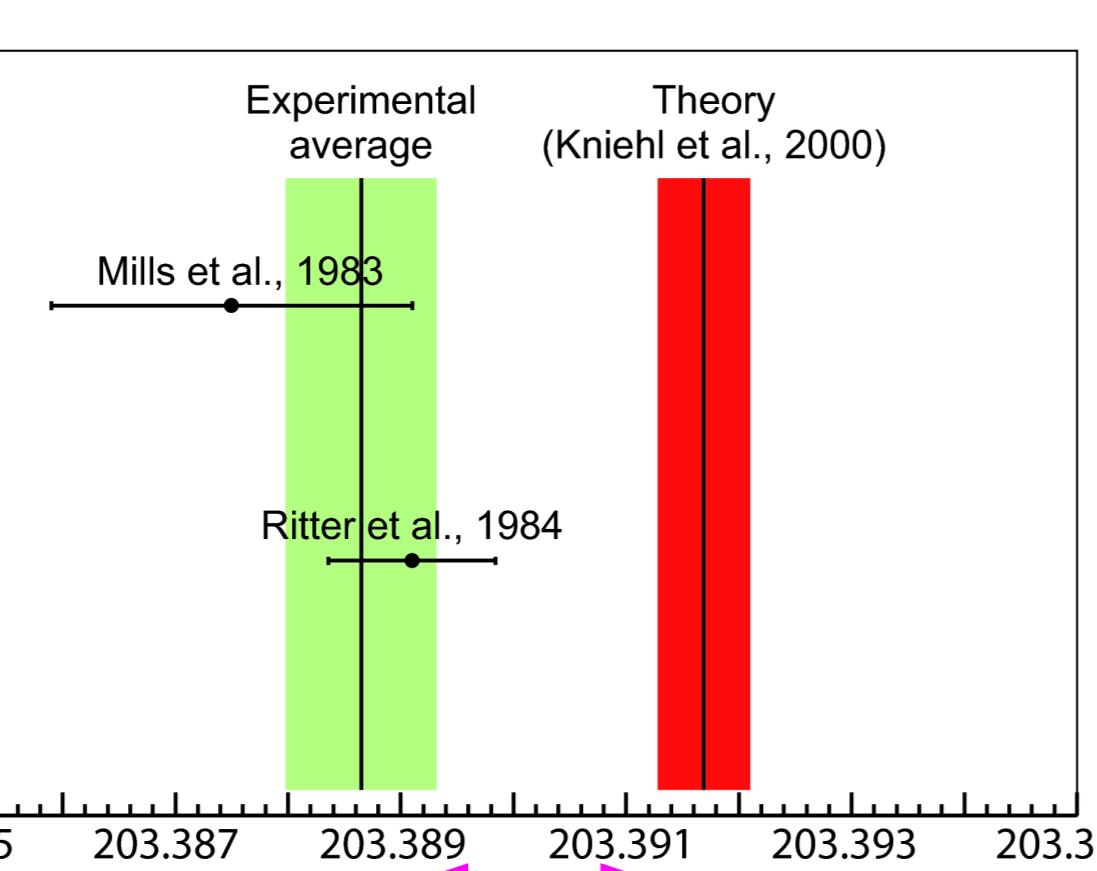


15 ppm (3.9 σ) discrepancy

Measurement using the Zeeman effect

How to measure the HFS?

Induce the transition
→ 2 γ decay rate increases.

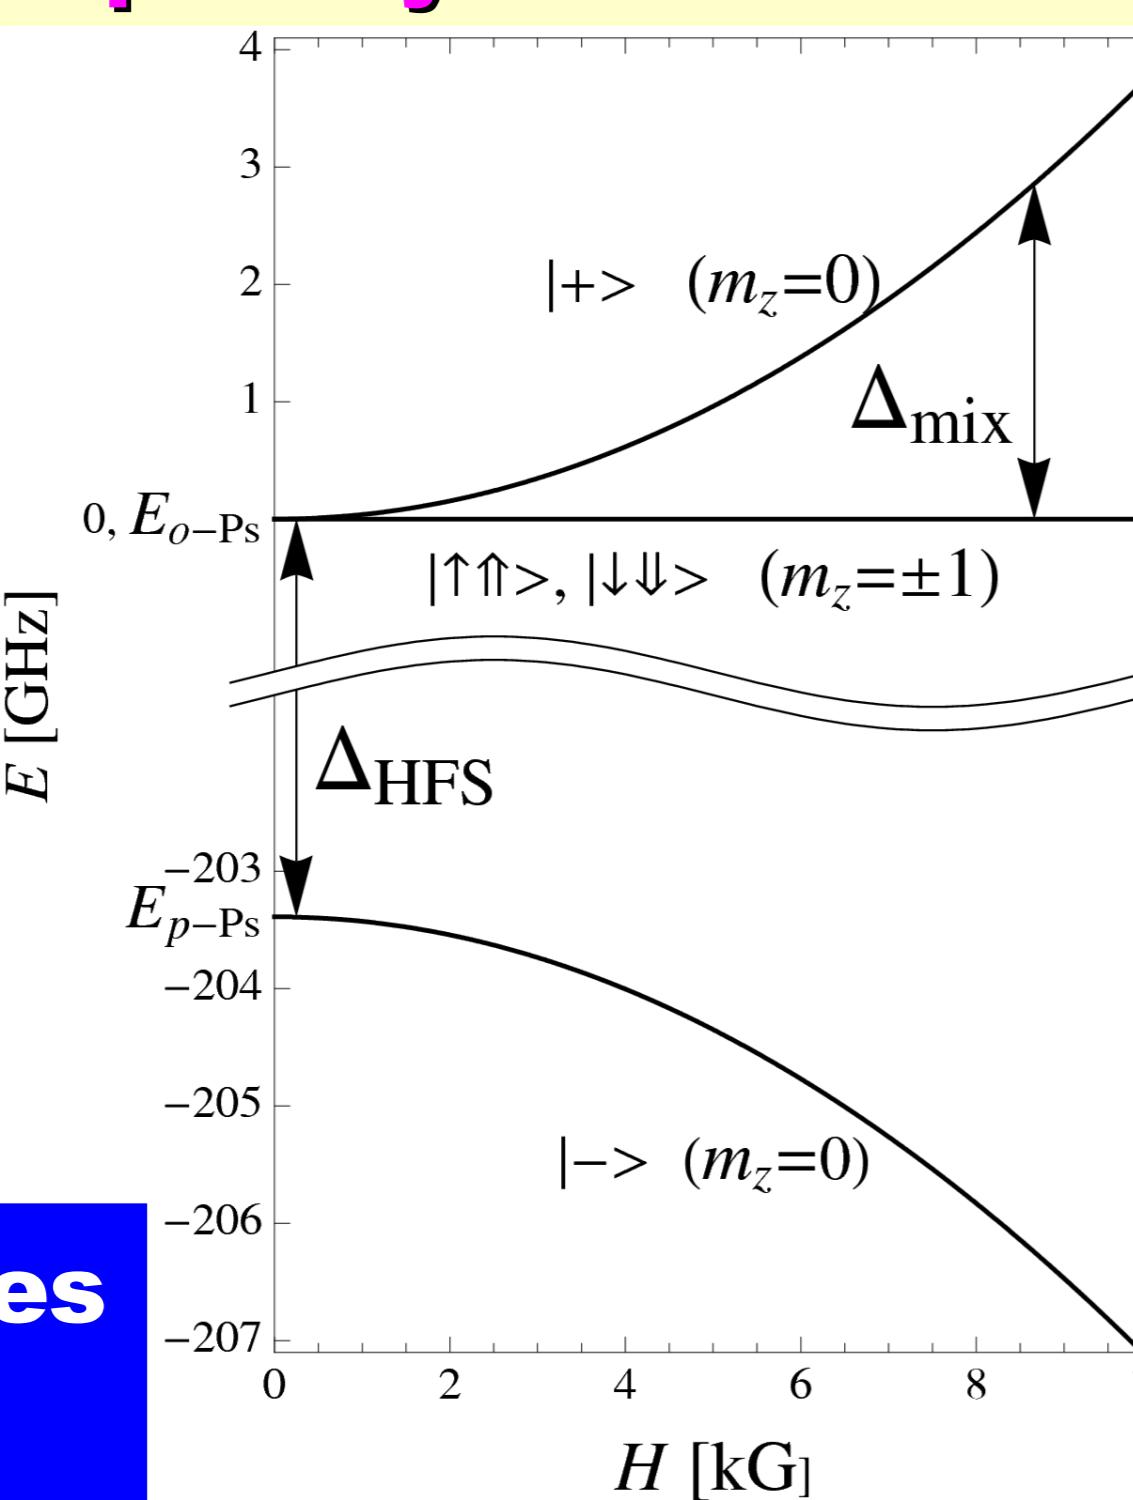

Common systematic uncertainties in the previous experiments

1. Underestimation of material effects

- Unthermalized o-Ps can have a significant effect (especially at low material density). ← o-Ps lifetime puzzle (1990's)

2. Non-uniformity of the magnetic field



- It's quite difficult to get ppm level uniform field in a large Ps creation volume

Experimental setup

To reduce these systematic uncertainties, we use the following new methods.

Large bore superconducting magnet

- Operated in Persistent Current mode (stable).
- 70 ppm magnetic field uniformity without any compensations.

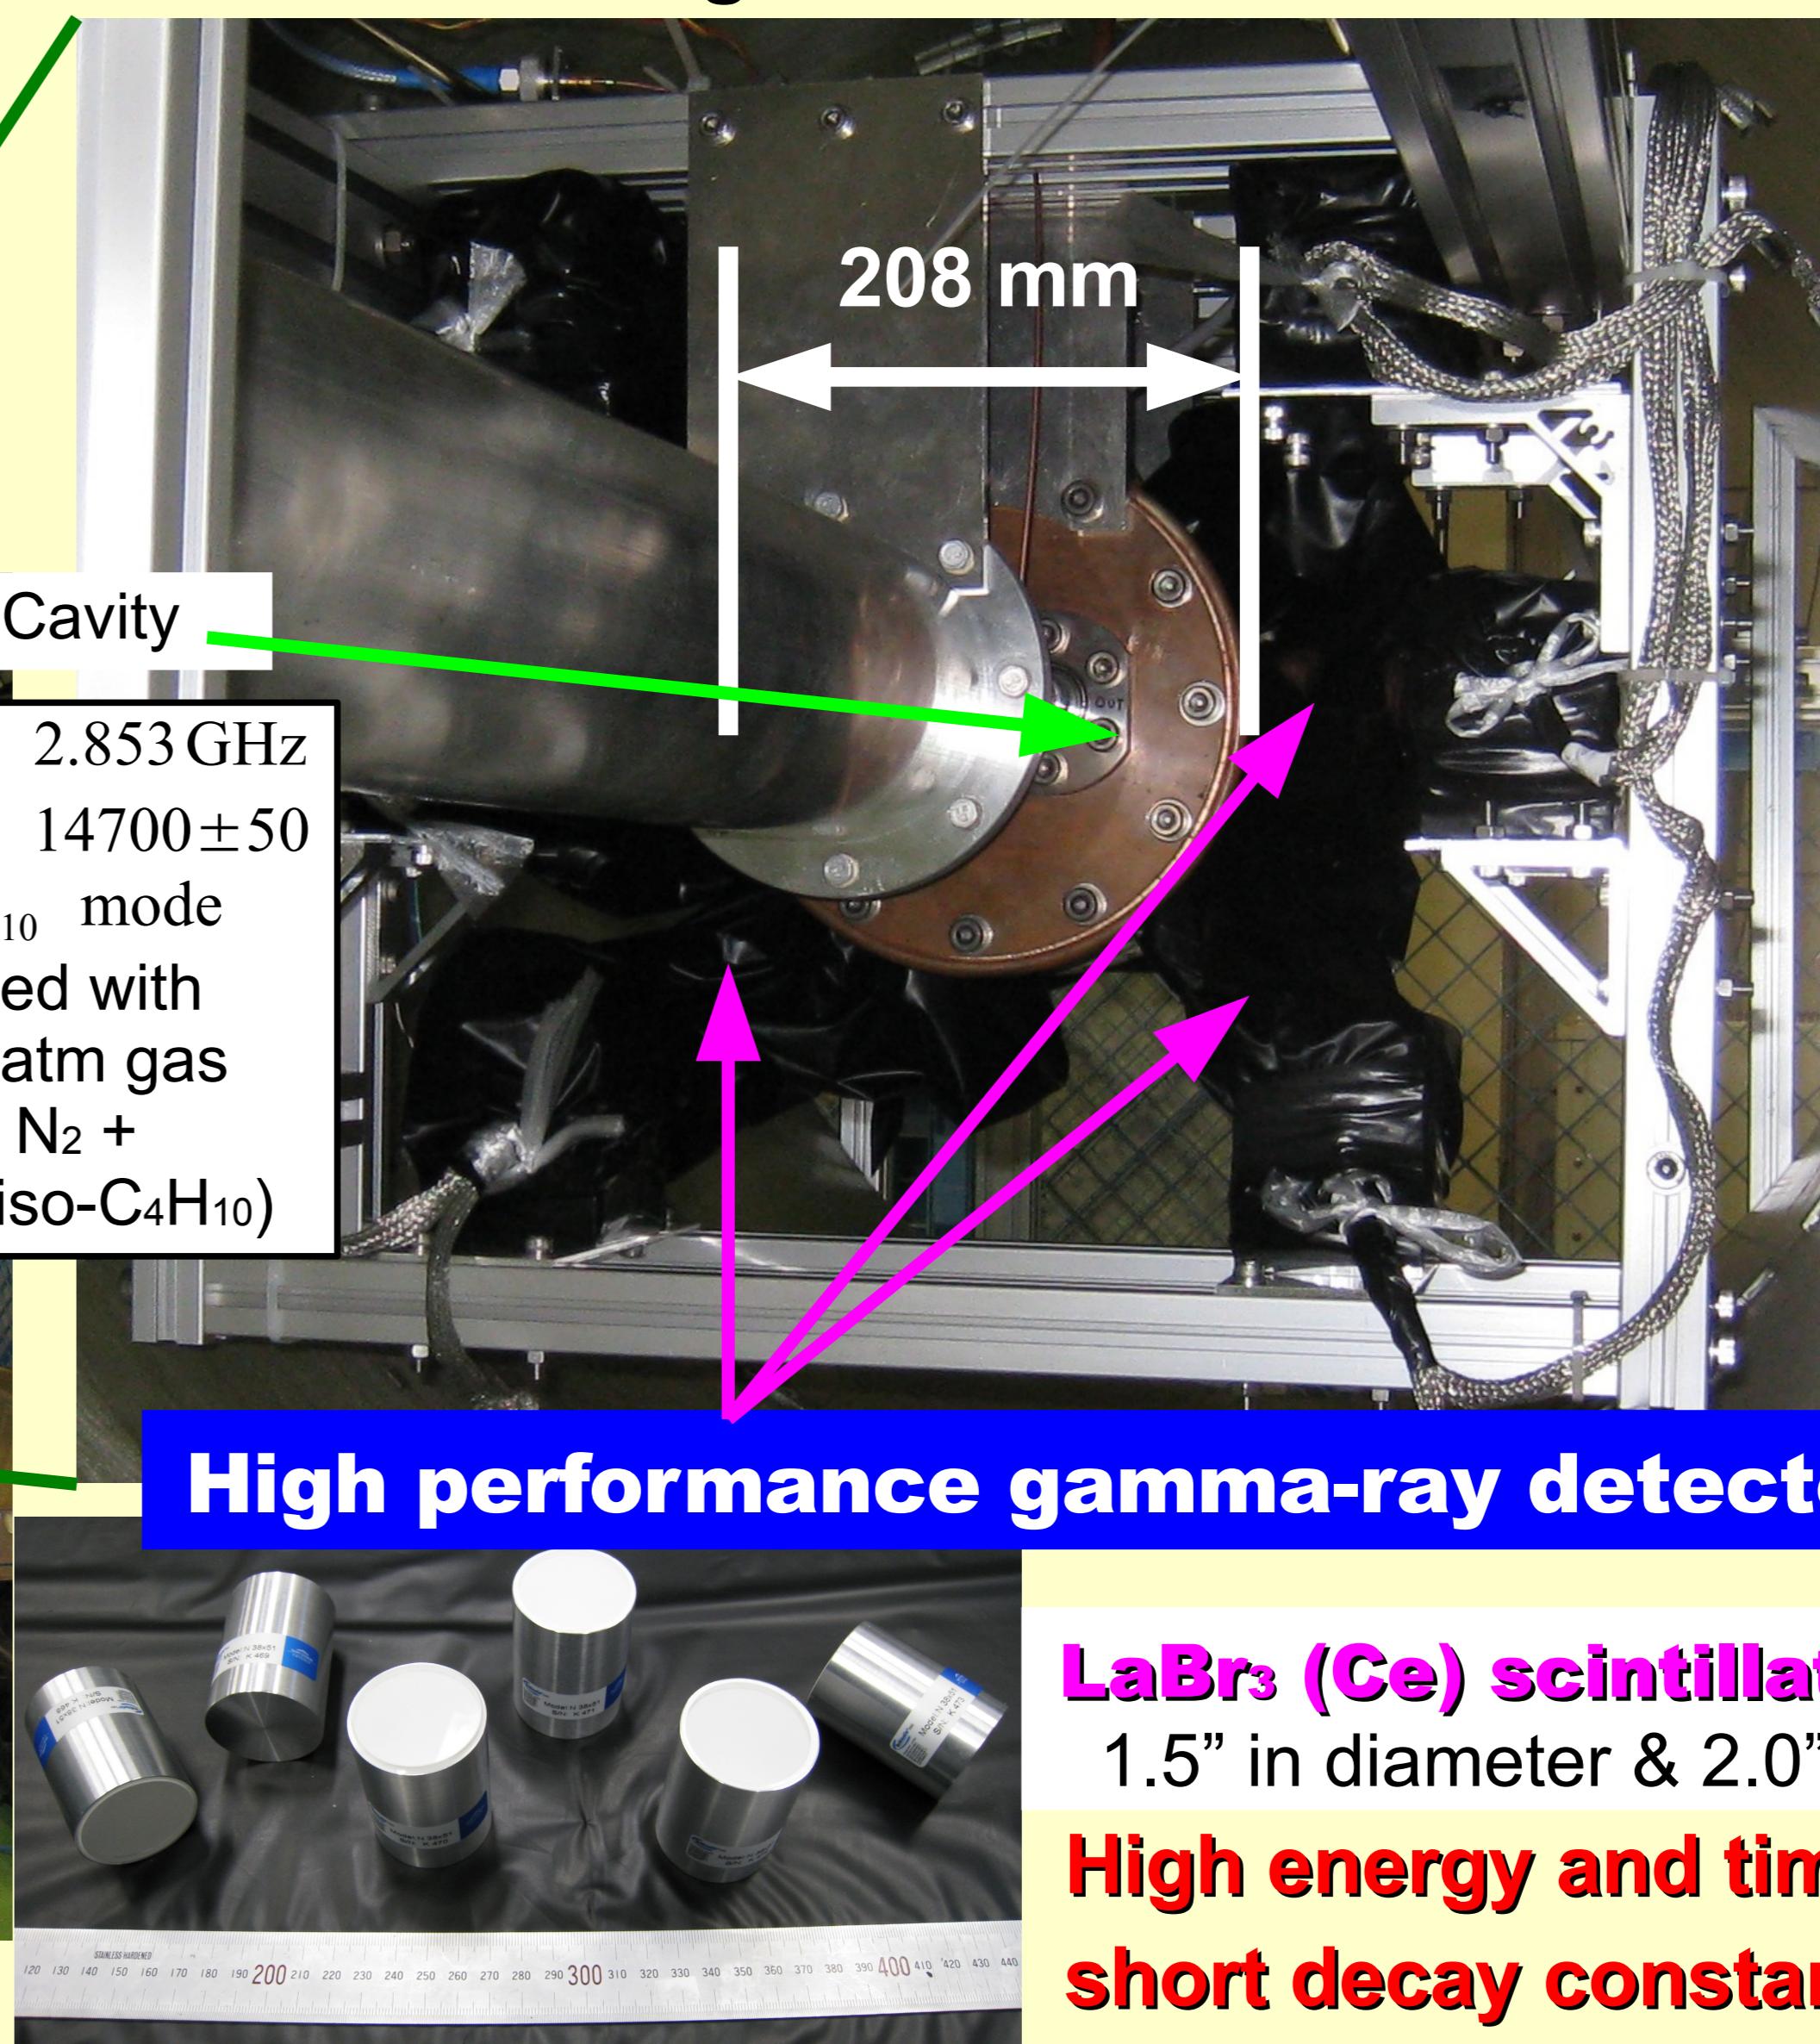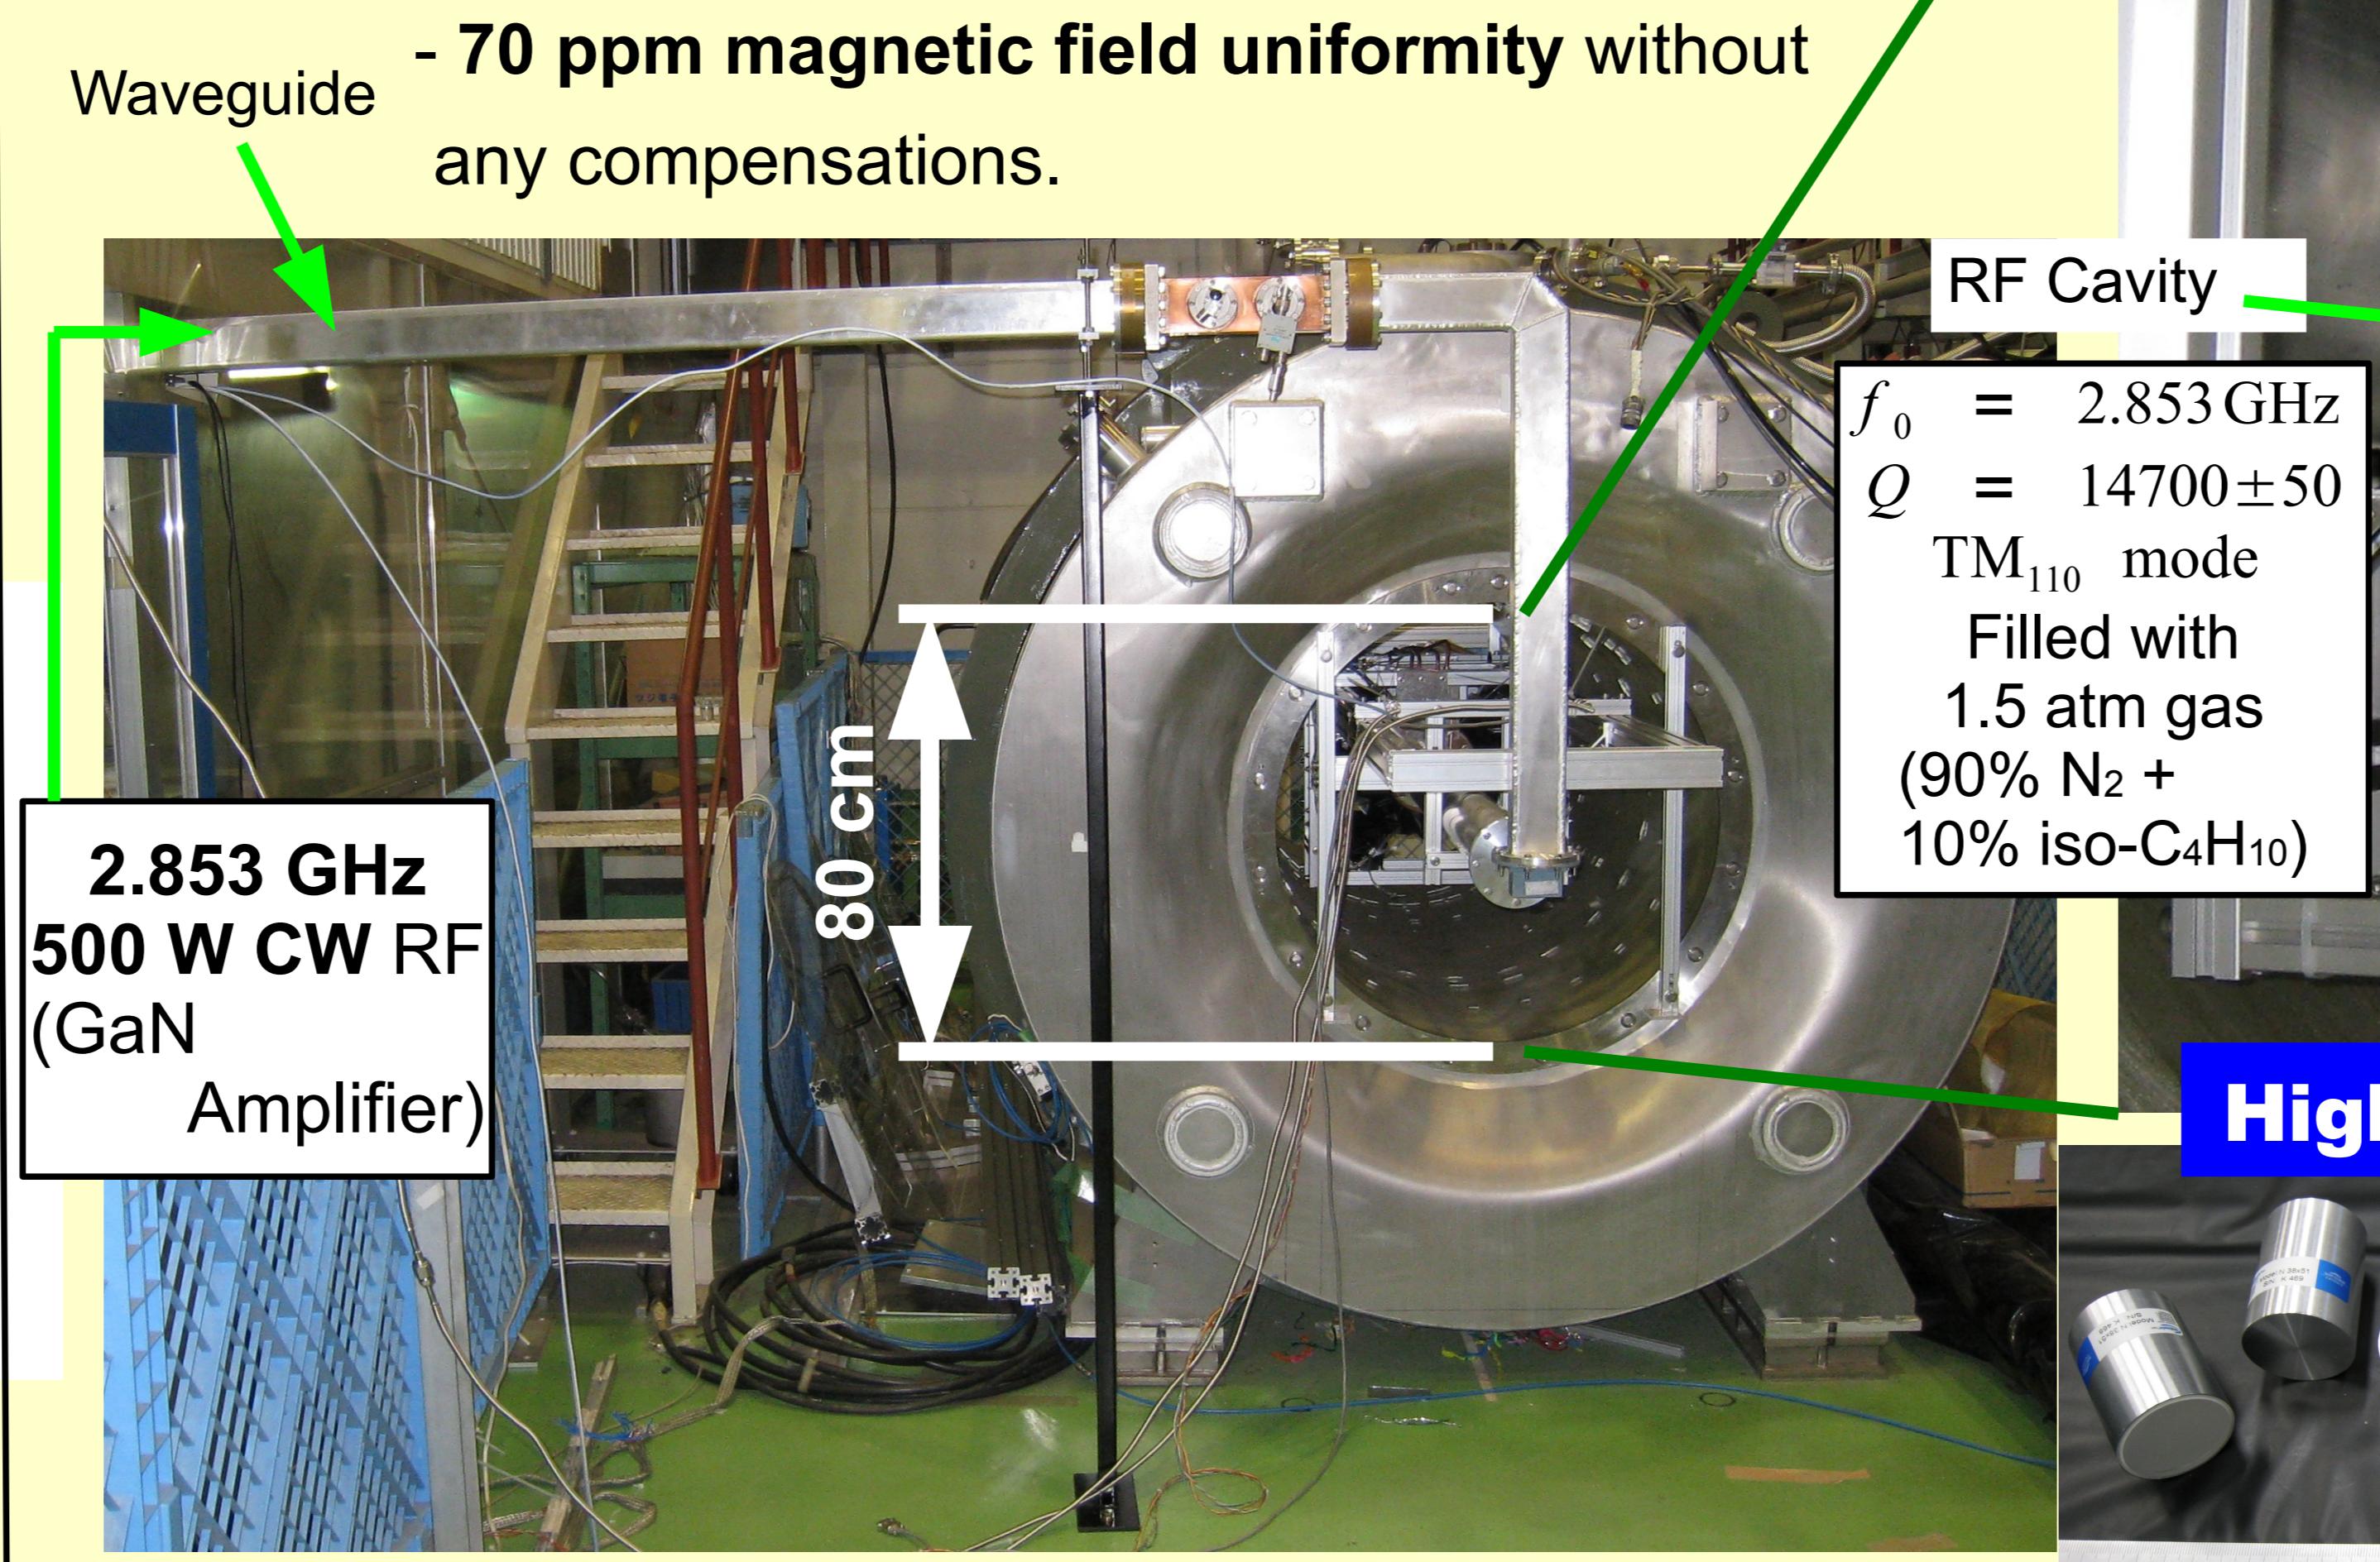


Time information

- Plastic scintillator is used to tag emitted β^+ .
- Get the time information between o-Ps creation ($t = 0$) and decay.

- (1) We can measure the thermalization.
(2) Prompt suppression


0.2 mm thick, 15 mm x 15 mm Plastic Scintillator

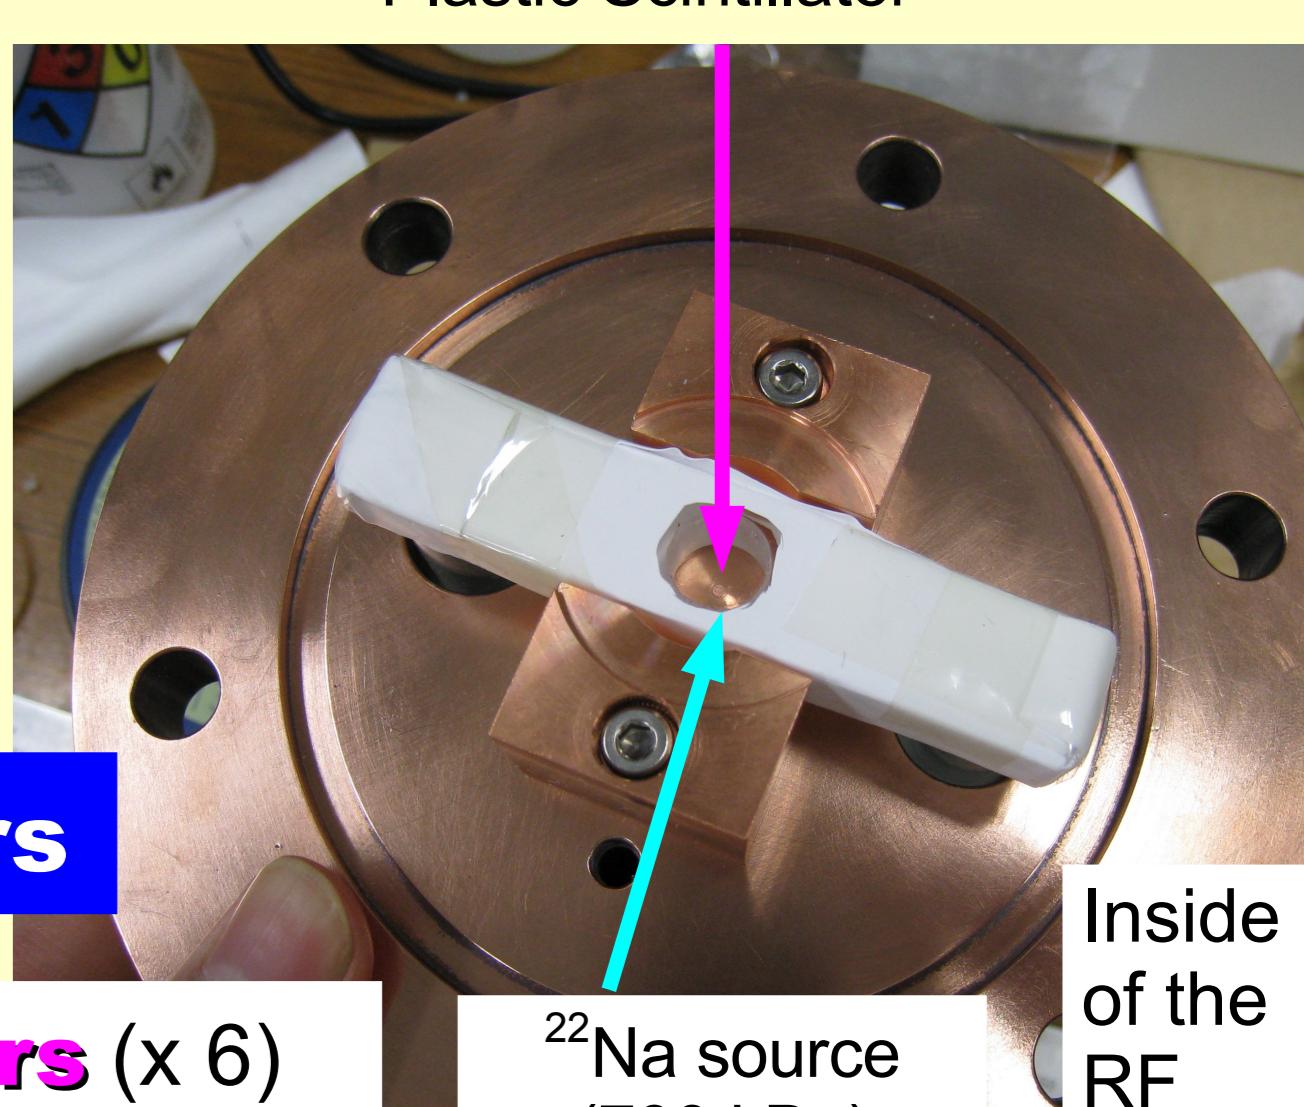


Current status

We are presently taking more data....

Preliminary plots

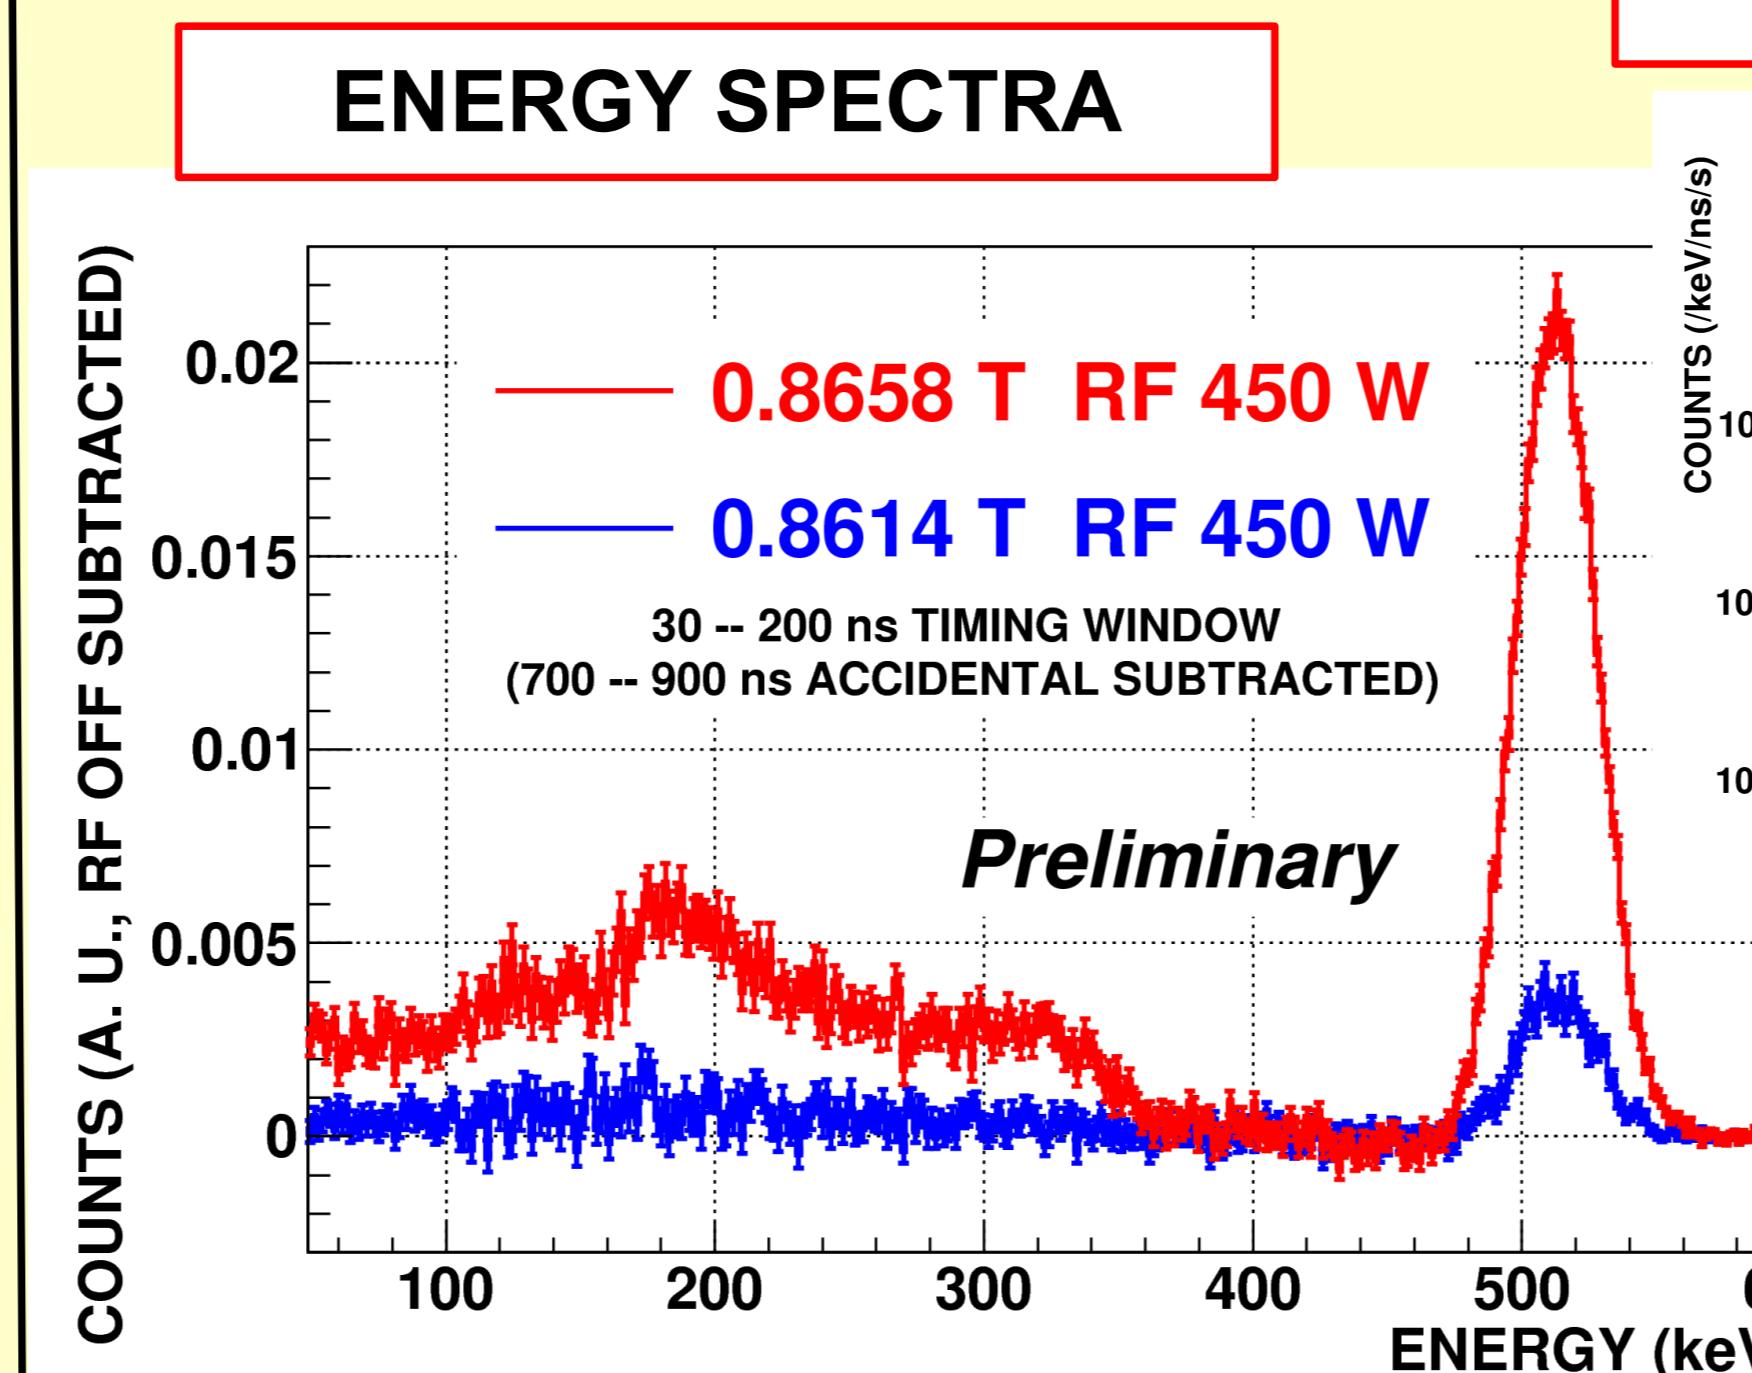

RESONANCE CURVE

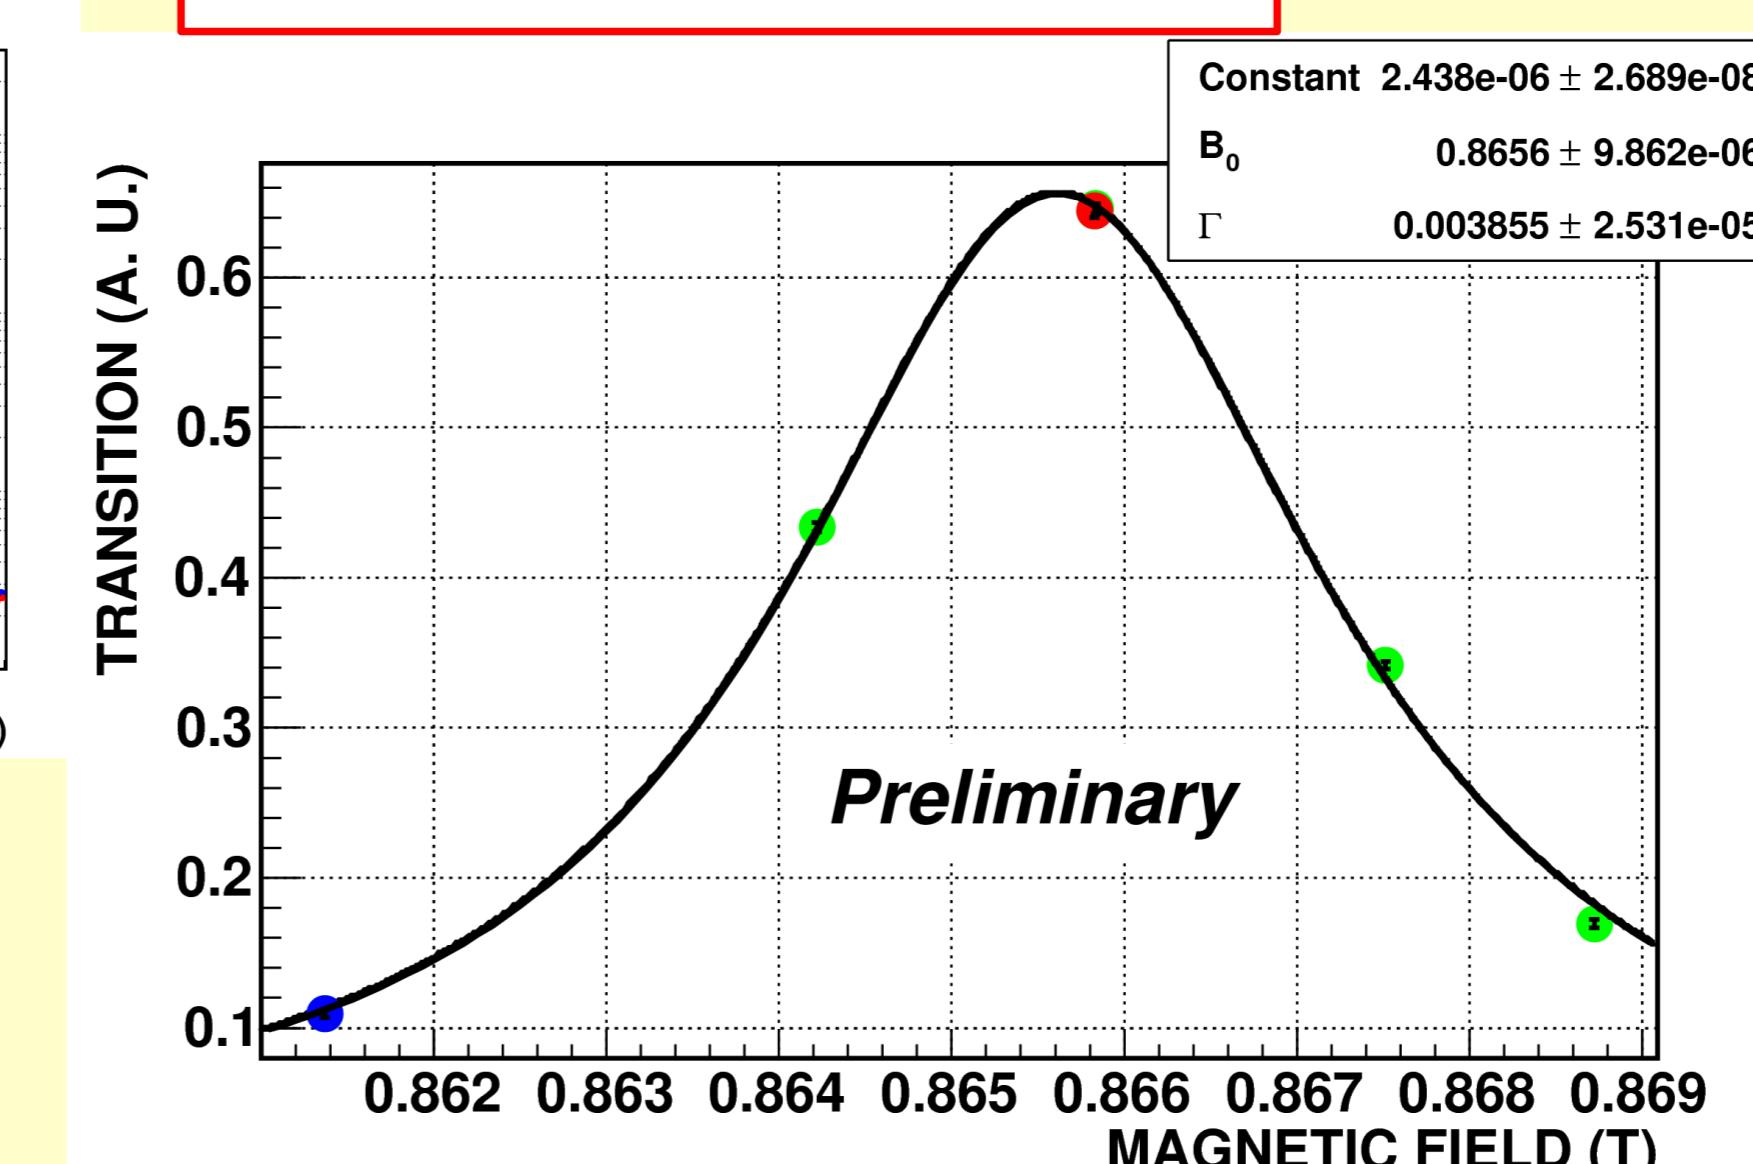

Converted HFS value (from an only 2 weeks run) is

203.399

± 0.005 (23 ppm, stat.)

± 0.029 (140 ppm, sys.) GHz (Preliminary)

(consistent with the previous experiments)

The systematic error mainly comes from the non-uniformity of the magnetic field.

Our goal

O (1) ppm accuracy in a year

1. Develop compensation coils
→ Get O(1) ppm B - uniformity
2. Precisely measure the thermalization function.
3. Derive the HFS value at O (1) ppm accuracy.
→ Solve or Confirm the discrepancy between the experimental values and the theoretical value.

2 γ decay rate increases because of the transition between o-Ps' $m_z=0$ and $m_z=\pm 1$ states.